

Installing Your Wi-Fi or Blue Tooth Receiver.

Elite Models that Apply: EL04-EL05-LE, Phenom1&2.			
Step	Description	Tools	Picture
1	Unscrew the (4) screws that attach the control panel to the red case.	Phillips Screw Driver	 <p>Control Panel - Open</p>
2	Take the plastic cover off of the Velcro, and stick it on the Left side of the case. (With the wires pointing toward the control panel).		
3	<p>Connect the red and white wire (coupling) with the white female 4-pronged housing, into the Remote 4-pronged male connector jack.</p> <p><i>(If you are installing the Wi-Fi or Blue Tooth Receiver ONLY with-out the Grand Remote Receive then continue to step 5).</i></p>		 <p>4 pronged Remote connector jack.</p>  <p>Wi-Fi or Blue Tooth red and white wire couple plugged into Remote connector jack.</p>
4	<p>Installing The Wi-Fi or Blue Tooth Receiver And The 20 Function Remote Receivers Into The Same Machine.</p> <p>Plug the Female 4-pronged Y-pig-tail into the 4-pronged male remote connector jack.</p> <p>Plug the Wi-Fi red and white wire (coupling) with the female 4-pronged housing, into one of (it does not matter which one) the 4-pronged male connector jacks on the Y-pig-tail.</p>		 <p>4 pronged Remote connector jack.</p>


Installing Your Wi-Fi or Blue Tooth Receiver.

Connect the female 4-pronged multi color wiring of the 20 function remote receiver, into the left over 4-pronged male Y-pig-tail connector jack.

Continue on to Step 5.



Y-Pig-Tail attached to 4-prong Remote connector jack.

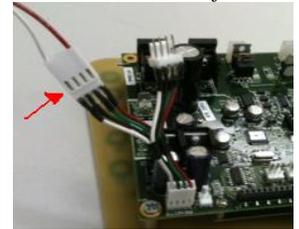


Red and white Wi-Fi female plugged into Y-Pig-Tail.




20 function remote receiver plugged into Y-Pig-Tail

5

Plug the green and white wire (coupling) with the white female 3-pronged housing, into the J6 3-pronged male connector jack.

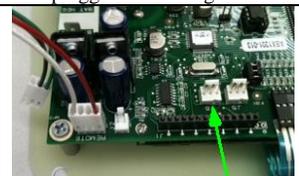

J6 3-pronged connector jack.

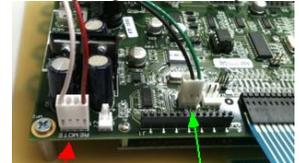


Wi-Fi or Blue Tooth green and white wire couple plugged into J6 connector jack.




Green and white wire couple plugged into J6 connector jack, with additional Y-Pig-Tail housing both red and white Wi-Fi or Blue Tooth receiver and 20 function remote receiver.

Installing Your Wi-Fi or Blue Tooth Receiver.

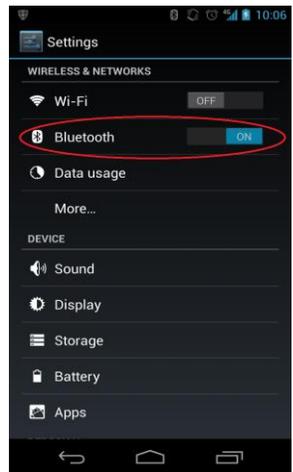
<p>6</p>	<p>Screw the control board back onto the case, and follow the i-Phone or Blue Tooth quick start instructions.</p>	<p>Philips Screw Driver</p>	
<p>7</p>	<p>Configuring your Wi-Fi and iPhone to connect to the Lobster App.</p> <p>Go to settings and click on "Wi-Fi" connections. Your device will detect the network called "LobsterSports-xx". Select this network. Note: xx is a number unique to your machine. For this network, press the > to adjust its settings:</p> <p>a) Make sure your device is set up to detect "LobsterSports-xx" automatically by setting your 'Auto-Join' button to ON.</p> <p>Click on your Lobster Remote icon on your iPhone/iTouch device. Please allow anywhere from 30 seconds to 1 full minute for your machine and phone to properly acknowledge each other! Your Lobster app will tell you when you are ready to go.</p>		
<p>8</p>	<p>Configuring your Blue Tooth to connect to the Lobster App.</p> <ol style="list-style-type: none"> 1. Turn your Wi-Fi to the off position before scanning for blue tooth. 2. Press 'Scan for Devices' in the new pop up window. 3. A device, RN42-xxxx, should be found under 'Other Available Devices', where xxxx will be a unique ID for your installed Bluetooth module. 4. Select device & type in "1234" when asked for password. Once entered in your device will be paired. 5. Open up the Lobster Remote App and click on the 3 dots or (bars) button near the bottom of your device 		 <p>Setting Screen (Android Device).</p>

Installing Your Wi-Fi or Blue Tooth Receiver.


(this is located close to your 'Home' button). **NOTE:** *With some new phones, you might need to hold down a button (such as the "back" button, or "home" button) to bring up the "secret menu". This menu then allows you to click on the 3 dots or (bars) button as it will appear from the hidden menu. Upon clicking this button, there should be a pop-up which shows a target sign and says 'Connect to Device'. Click this and your App should be good to go.*

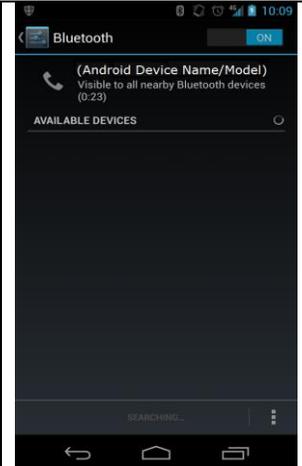

Scanning for Blue Tooth devices.

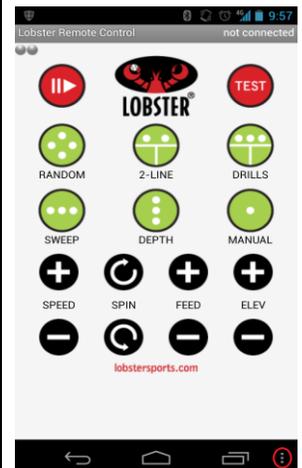

"Options" button on Android device.

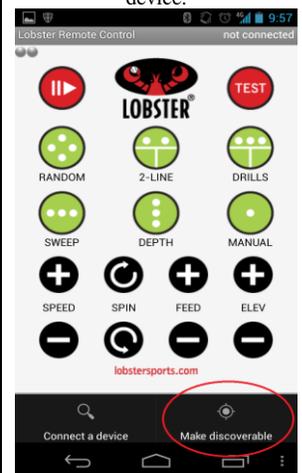

Pop up menu showing "Make Discoverable".